

## FEATURES

- MG trim option fits metric sized ceiling systems, nominal 600 x 600 mm tee-bar centers.
- Full family of specification grade static luminaires offers choice of sizes, ceiling trims, door frames and other options to provide general illumination for every recessed application.
- Standard door is fully gasketed aluminum with mitered corners — completely frames shielding. Corners screwed together for rigidity, easy lens replacement.
- Urethane foam gasket eliminates light leaks between door frame and housing.
- Companion fixtures with overlapping flanged trim available in imperial sized fixtures with standard swing-gate hangers.
- Optional spring-loaded latches
- Guaranteed for one year against mechanical defects in manufacture.

## SPECIFICATIONS

**BALLAST** — Thermally protected, resetting, Class P, HPF, non-PCB, UL listed, CSA-certified ballast is standard. Energy-saving and electronic ballasts are sound rated A. Standard combinations are CBM approved and conform to UL 935.

**WIRING & ELECTRICAL** — Fixture conforms to UL 1570 and is suitable for damp locations. AWM, TFN or THHN wire used throughout, rated for required temperatures.

**MATERIALS** — Housing formed from cold-rolled steel. Acrylic shielding material 100% UV stabilized. No asbestos is used in this product.

**FINISH** — Five-stage iron-phosphate pretreatment ensures superior paint adhesion and rust resistance. Painted parts finished with high-gloss, baked white enamel.

**LISTING** — UL listed and labeled. CSA certified (see options). NOM labeled (see options).

Specifications subject to change without notice.

Type


Catalog number

.....  
.....  
.....

Specification Premium Static Troffer

# SP 600x600

**Metric**  
Straight Lamps  
2, 3 or 4 lamps

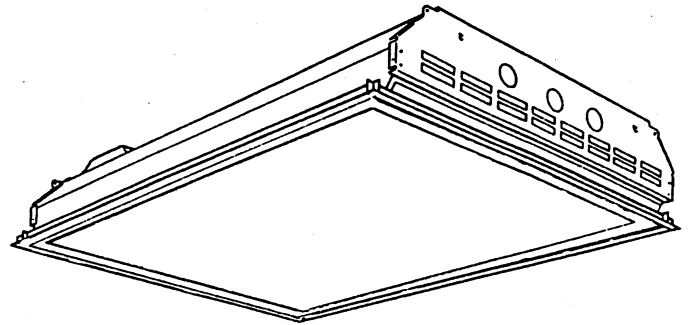

## PHOTOMETRICS

Full photometric data available upon request.


# SP 600 x 600 Straight Lamps

## MOUNTING DATA

Fixtures not suitable for end-to-end row mounting. Over-all fixture length is 609.6 mm.

## DIMENSIONS

Inches (centimeters). Subject to change without notice.

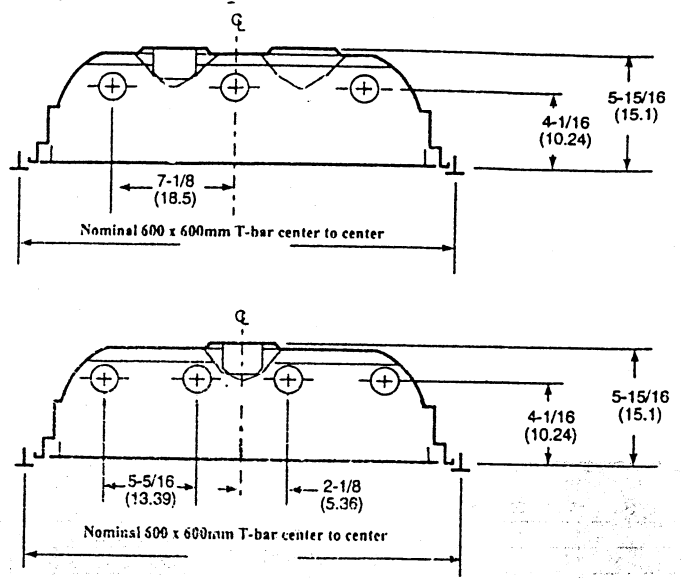

## ORDERING INFORMATION

Choose the boldface catalog nomenclature that best suits your needs and write it in the appropriate blank.

Example: 2SP MG 3 17 FW A12 120 GEB

<p><b>2SP</b></p> <p><b>Series</b> 2SP 2' wide</p> <p><b>Trim type</b> MG Metric grid</p>	<p><b>Number of lamps</b> 2, 3, 4 Not included</p> <p><b>Lamp type</b> 17 17W T8 (24") 20 20W T12 (24")</p>	<p><b>Door frame</b></p> <p>FN Flush aluminum, natural FM Flush aluminum, matte black FW Flush aluminum, white RN Regressed aluminum, natural RM Regressed aluminum, matte black RW Regressed aluminum, white</p>	<p><b>Voltage</b> 120, 277, 347 Others available</p>	<p><b>Options</b></p> <p>1/3 One 3-lamp ballast. GEB Electronic ballasts, ≤20% THD. GEB10 Electronic ballasts, ≤10% THD. EL Emergency battery pack (nominal 300 lumens. See Life Safety Section). GLR Internal fast-blow fuse. GMF Internal slow-blow fuse. PWS1836 6' prewire, 3/8" dia., 18-gauge, 3 wires. SLL Spring-loaded door latches LP Lamped, specify lamp type and color. PAF Painted after fabrication (white enamel). SSR Specular silver interior finish (95% reflective). CSA CSA-labeled for US shipment to Canada. NOM NOM-labeled for shipment to Mexico.</p>
<p><b>Diffuser type</b></p> <p>A12 #12 pattern acrylic A12125 #12 pattern acrylic, .125" thick A19 #19 pattern acrylic, .156" thick A15 #15 pattern acrylic, .2" thick AC Dropped dish diffuser, matte white acrylic PC1S 1/2" x 1/2" x 1/2" plastic cube louver, silver PC2S 1-1/2" x 1-1/2" x 1" plastic cube louver, silver w/ flange PC3S 3/4" x 3/4" x 1/2" plastic cube louver, silver</p>				

SP 600x600 MG

LG 6-96

©1995 Lithonia Lighting 5/95

SP1X4.PM5